


Chip Encapsulants

For Superior Protection on Flexible and Rigid Platforms

DYMAX 9000 Series UV/Visible light-curable encapsulants cure in seconds and are easily incorporated into automated systems for maximizing microelectronic assembly and protection speeds. These tough, flexible encapsulants have high ionic purity, resistance to humidity, and resistance to thermal shock to effectively protect components and improve their reliability. 9000 Series single-component encapsulants contain no sharp, abrasive mineral or glass fillers to abrade fine wires, and their combination of low T_g and low modulus means low stress. They have excellent adhesion to Polyimide, PET, flexible printed circuits, FR4, and ceramic boards and provide superior protection for glob top and chip-on-board applications. 9000 series encapsulants are ideal for encapsulating IC's in flex circuits. The encapsulants are available in a wide range of viscosities, from thin wicking to non-flowing gel.

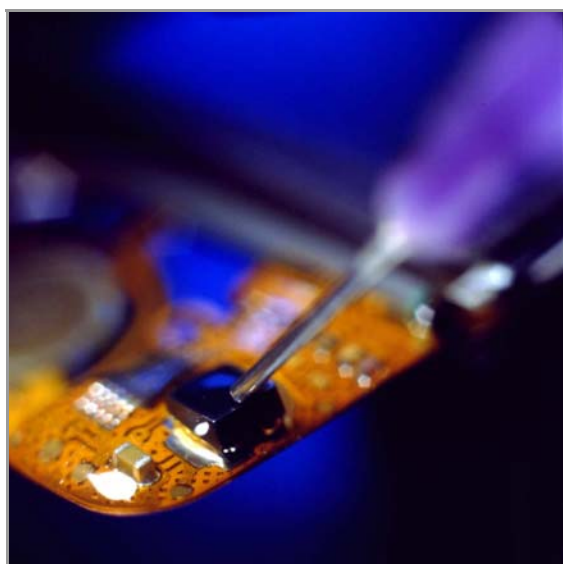


Clear UV-Curable Encapsulants

Feature	Benefit
<ul style="list-style-type: none"> UV/Visible light cure in seconds 	<ul style="list-style-type: none"> Highest assembly throughput Minimal handling requirements
<ul style="list-style-type: none"> 100% solvent free 	<ul style="list-style-type: none"> No VOCs High coverage
<ul style="list-style-type: none"> High ionic purity Resistance to thermal shock Resistance to moisture Low stress under thermal cycle Electrically insulating 	<ul style="list-style-type: none"> Maximum post-assembly reliability
<ul style="list-style-type: none"> Room-temperature storage 	<ul style="list-style-type: none"> Ease of storage Eliminate energy waste of refrigeration



Product	Features	Application	Durometer Hardness	Viscosity (cP)	Elongation at Break	Modulus of Elasticity
9001-E-v3.1	General purpose, medium viscosity encapsulant, good adhesion to flexible and rigid printed circuits	Chip Encapsulant	D45	4,500	150%	2,500 psi
9001-E-v3.5	Higher viscosity 9001-E Series encapsulant	Chip Encapsulant	D45	17,000	150%	2,500 psi
9001-E-v3.7	Thixotropic viscosity encapsulant	Dam or Thick Coatings	D45	50,000	150%	2,500 psi
9008	More flexible version of 9001-E-v3.1 for difficult substrates	Chip Encapsulant	A85	4,500	300%	2,000 psi

High Ionic Purity

Typical Ionic Content		
Extractable Chloride	<10 ppm	IC
Sodium	<10 ppm	ICP
Potassium	<10 ppm	AA
Fluoride	<10 ppm	IC




IC Kapton
Flex Circuit Encapsulant

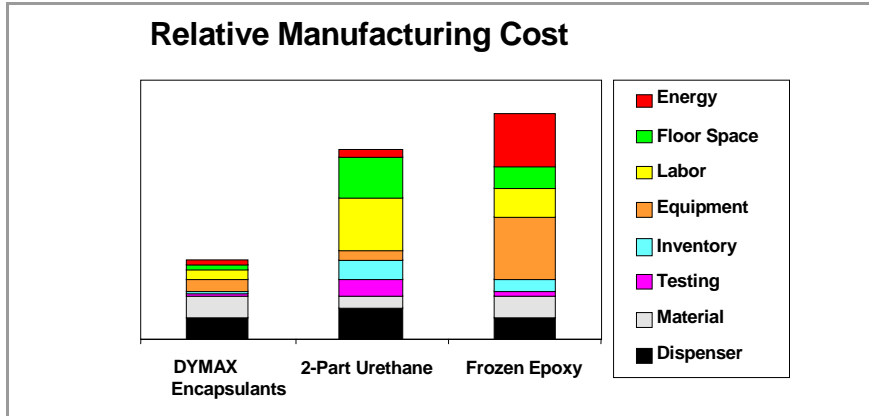


Glob Top and
Black Encapsulants

Curing Options for DYMAX Encapsulants

DYMAX encapsulants cure in seconds upon exposure to UV light, affording the fastest processing possible. Avoid processing bottlenecks by choosing an efficient and cost effective DYMAX encapsulant with a matched DYMAX UV light-curing system.

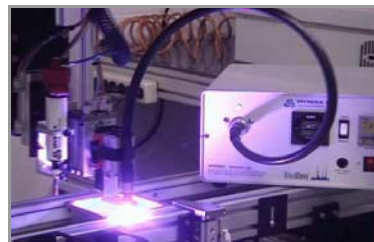

Automated DYMAX spot light-curing
system mounted on a robotic dispenser

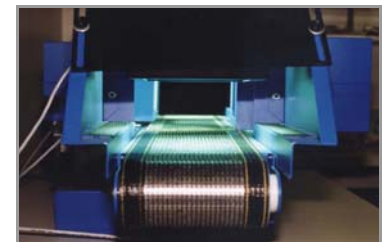

Cure large parts or arrays of parts
under high-intensity conveyed
light-curing systems

For further assistance with adhesive and equipment selection, contact DYMAX Applications Engineering.



In the U.S. Call: 877.396.2988
 In North and South America Call: +1.860.482.1010
 In Europe Call: +49 (0) 611.962.7900
 In China Call: +86.755.83485759
 In Asia Call: +852.2460.7038
 In Korea Call: 82.2.784.3434

www.dymax.com ♦ www.dymax.de ♦ www.dymax.com.cn ♦ www.dymax.co.kr

DYMAX Corporation - 318 Industrial Lane - Torrington, CT 06790 - Phone: 860.482.1010 - Fax: 860.496.0608 - E-mail: info@dymax.com - www.dymax.com

DYMAX Europe GmbH - Kasteler Strasse 45 - Building G 359 - 65203 Wiesbaden, Germany - Phone: +49 (0) 611.962.7900 - Fax: +49 (0) 611.962.9440 - E-mail: info_de@dymax.com - www.dymax.de

DYMAX UV Adhesives & Equipment (Shenzhen) Co., Ltd - Unit 807, Talfook Building, No. 9 Shihua Road, Futian Free Trade Zone, Shenzhen, China 518038 - Phone: +86.755.83485759 - Fax: +86.755.83485760 - E-mail: dymaxasia@dymax.com - www.dymax.com.cn

DYMAX Asia (HK) - Room 1103, 11/F., Metro Centre, Phase I, 32 Lam Hing St., Kowloon Bay, Hong Kong - Phone: +852.2460.7038 - Fax: +852.2460.7017 - E-mail: dymaxasia@dymax.com - www.dymax.com.cn

DYMAX Korea LLC - #903, CCMM B/D, 12 Yeoido-Dong, Youngdungpo-Gu, Seoul, Korea, 150-869 - Phone: 82.2.784.3434 - Fax: 82.2.784.5775 - E-mail: info@dymax.kr - www.dymax.co.kr

© 2003-2010 DYMAX Corporation. All rights reserved. All trademarks in this bulletin, except where noted, are the property of, or used under license by DYMAX Corporation, U.S.A.

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. DYMAX Europe GmbH does not warrant the data contained in this bulletin. Any warranty applicable to products, its application and use is strictly limited to that contained in DYMAX Europe GmbH's General Terms and Conditions of Sale published on our homepage http://www.dymax.com/de/pdf/dymax_europe_general_terms_and_conditions_of_sale.pdf. DYMAX Europe GmbH does not assume any responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than DYMAX Corporation or act as a grant of license under any DYMAX Corporation Patent. DYMAX Europe GmbH recommends that each user adequately test its proposed use and application of the products before actual repetitive use, using the data contained in this bulletin as a general guide. LIT272EU Rev. 04/01/2010