

DUAL CURE 9481 LIGHT/MOISTURE CURE CONFORMAL COATING

APPLICATIONS

- Conformal Coating

FEATURES

- UV / Visible Light Curing
- Secondary Moisture Cure
- Solvent-Free
- No VOC
- Low Odor
- One Part, No Mixing Required

QUALIFICATIONS

- MIL-I-46058C Listed
- IPC-CC-830B
- UL 94 V0
- Bright Blue Fluorescing
- Chemically Resistant

DYMAX 9481 is a solvent-free light & moisture cure conformal coating specifically formulated to ensure complete cure in applications where shadowed areas on high density circuit boards are a concern. Shadowed areas cure over time with moisture. DYMAX 9481 fluoresces vivid blue when exposed to UV light (365 nm) and is low viscosity, allowing it to be dispensed easily with all of the current methods of dispensing. DYMAX lamps offer the optimum balance of UV and visible light for the fastest and deepest cures. DYMAX 9481's ability to cure in seconds with light, enables faster processing, greater output and lower assembly costs. This product is in full compliance with the RoHS Directives 2002/95/EC and 2003/11EC.

TYPICAL UNCURED PROPERTIES *

Property	Value	Test Method
Solvent Content	No Nonreactive Solvents	N/A
Chemical Class	Acrylated Urethane	N/A
Appearance	Clear/Light Amber Liquid	N/A
Solubility	Nonalcoholic Solvents	N/A
Density, g/ml	1.07	ASTM D-1875
Viscosity, cP (20 rpm)	125 nominal	ASTM D-2556

ELECTRICAL PROPERTIES *

Property	Value †	Test Method
Dielectric Constant (1 MHz)	3.25	ASTM D-1304-99
Dissipation Factor (1 MHz)	0.01	ASTM D-1304-99
Dielectric Strength, kV/mm [V/mil]	75 [1,900]	ASTM D-1304-99
Volume Resistivity, ohm-cm	1.64 x 10 ¹⁶	ASTM D-1304-99
Surface Resistivity, ohm	2.46 x 10 ¹⁶	ASTM D-1304-99

CURED MECHANICAL PROPERTIES *

Property	Value †	Test Method
Durometer Hardness	D75	ASTM D-2240
Tensile at Break, MPa [psi]	22 [3,200]	ASTM D-638
Elongation at Break, %	4.0	ASTM D-638
Modulus of Elasticity, MPa [psi]	500 [73,000]	ASTM D-638

ADHESION

Substrate	Recommendation
Leadframe	✓
Ceramic	✓
PCB	✓
Flex	N/A
Silicon	o

✓ Recommended Adhesive o Limited Applications
 † Requires Surface Treatment (e.g., plasma, corona treatment, etc.)

OTHER CURED PROPERTIES *

Property	Value †	Test Method
Boiling Water Absorption, % (2 hr)	1.0	ASTM D-570
Water Absorption, % (25°C, 24 hr)	0.3	ASTM D-570
Linear Shrinkage, %	1.3	ASTM D-2566

* Not Specifications

† Measured 100 hours after light cure

N/A Not Applicable

DYMAX Corporation - 318 Industrial Lane - Torrington, CT 06790 - Phone: 860.482.1010 - Fax: 860.496.0608 - E-mail: info@dymax.com - www.dymax.com

DYMAX Europe GmbH - Trakehner Strasse 3 - D-60487 Frankfurt am Main - Germany - Phone: 0049.69.7165.3568 - Fax: 0049.69.7165.3830 - E-mail: dymaxinfo@dymax.de - www.dymax.de

DYMAX UV Adhesives & Equipment (Shenzhen) Ltd - Unit 807, Talfook Building, No. 9 Shi Hua Road, Futian Free Trade Zone, Shenzhen, China 518038
 Phone: 86.755.83485759 - Fax: 86.755.83485760 - E-mail: simon_ang@dymax.com - www.dymax.com.cn

DYMAX Asia (HK) - Unit 1006, 10/F., Carnarvon Plaza, No. 20, Carnarvon Road, T.S.T., Kowloon, Hong Kong - Phone: 852.2460.7038 - Fax: 852.2460.7017 -
 E-mail: simon_ang@dymax.com - www.dymax.com.cn

DYMAX®, Light-Weld®, Light-Welder®, Multi-Cure®, Ultra Light-Weld®, MEDI-CURE®, MD® and SPEEDMASK® are registered trademarks of DYMAX Corporation

CURING GUIDELINES

Fixture Time is defined as the time to develop a shear strength of 0.1 N/mm² [10 psi] between glass slides. Actual cure time is typically 3 to 5 times fixture time.

DYMAX Curing System (Intensity)	Fixture Time or Belt Speed ^B
2000-EC (50 mW/cm ²) ^A	3 sec
5000-EC (200 mW/cm ²) ^A	2 sec
BlueWave™ 50 AS (3.0 W/cm ²) ^A	<1.2 sec
BlueWave™ 200 (10 W/cm ²) ^A	<0.8 sec
UVCS Conveyor with one 5000-EC (200 mW/cm ²) ^A	>7.0 m/min [23 ft/min]
UVCS Conveyor with Fusion F300S (2.5 W/cm ²) ^C	>8.2 m/min [27 ft/min]

^A Intensity was measured over the UVA range (320-395 nm) using the DYMAX ACCU-CAL™ 50 Radiometer.

^B Curing through light blocking substrates may require longer cure times if they obstruct wavelengths used for light curing (320-450 nm for UV light+visible light curing and 320-400 nm for UV light-only curing). These fixture times/speeds are typical for curing thin films through 100% light transmitting substrates.

^C At 2.1" focal distance. Maximum speed of conveyor is 8.2 m/min [27 ft/min]. Intensity was measured over the UVA range (310-395 nm) using the Dymax ACCU-CAL™ 100 Radiometer.



Full cure is best determined empirically by curing at different times and/or intensities and measuring the corresponding change in cured properties such as tackiness, adhesion, hardness, etc. Full cure is defined as the point at which more UV exposure no longer improves cured properties. Higher intensities or longer cures (up to 5x) will generally not degrade DYMAX UV curing coatings. DYMAX recommends that customers employ a safety factor by curing longer and/or at higher intensities than required for full cure. Although DYMAX Applications Engineering can help, each customer must ultimately determine the curing parameters required for their unique application.

Moisture Cure Following Light Exposure

Moisture may be used as a secondary cure mechanism for shadowed areas that cannot be cured with light. Light cure is recommended prior to moisture cure. While moisture cure time is typically 2-3 days at 23°C [73°F], 50% RH, actual moisture cure time is application specific and may vary. Cure time depends on humidity level, amount of coating in shadowed areas and proximity of shadowed coating to humidity. Coating entrapped under large components may have a prolonged cure time. Exposure to heat (typically 65°C-80°C) and higher relative humidity will accelerate cure. Accelerated moisture cure time is also dependent on the variables listed above.

DEPTH OF CURE

The graphs below show the increase in depth of cure as a function of exposure time at two different lamp intensities. A 9.5 mm [0.37 in] diameter slug was cured in a polypropylene mold and cooled to room temperature. It was then released from the mold and the cure depth was measured. These depths are only due to light cure.

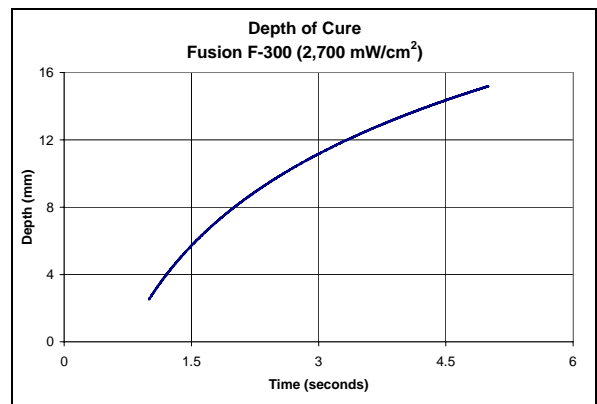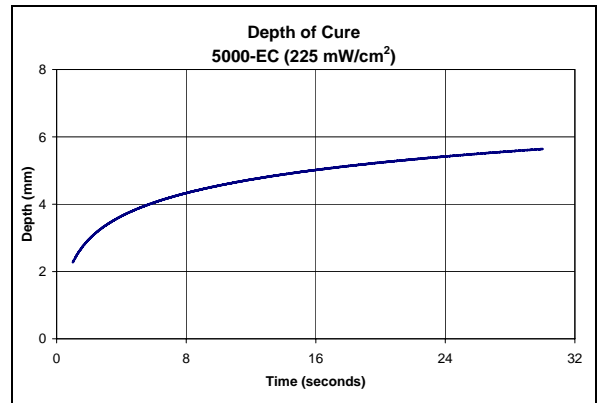

OPTIMIZING PERFORMANCE AND HANDLING

1. This product cures primarily with exposure to UV and/or visible light. Any shadowed areas cure over time with moisture. Exposure to air, UV, ambient or artificial light should be kept to a minimum before curing. Dispensing components including needles and fluid lines should be 100% light blocking, not just UV blocking.
2. All coated surfaces should be clean and free from grease, mold release or other contaminants prior to dispensing the coating.
3. Cure speed is dependent upon many variables in every application, including lamp intensity, distance from the light source, required depth of cure, bond gap and transmission of the substrate through which the energy must pass.
4. Oxygen may inhibit surface cure. Surfaces exposed to air may require high intensity UV (>100 mW/cm²) to produce a tack-free cure. Flooding the coated area with inert gas, such as nitrogen, can also reduce the affects of oxygen inhibition.
5. Parts should be allowed to cool before testing or subjecting to loads.
6. For rare applications, stress cracking may occur in assembled parts. There are three ways to solve the problem. One option is to heat anneal the parts to remove molded-in stresses. A second option is to eliminate or reduce interference fits between mating parts. The third option is to minimize the amount of time the liquid coating remains in contact with the substrate(s) prior to curing.
7. There is generally some heat associated with UV curing. If necessary, cooling fans can be placed in the curing area to reduce heat.
8. It is always a best practice to utilize an air exhaust system at the point of curing. This will minimize the heat and vapors formed during the curing process.
9. Resealing opened containers under nitrogen extends shelf life.

DISPENSING THE COATING

This material may be dispensed with a variety of automatic bench-top syringe applicators or other equipment as required. Direct questions relating to dispensing and curing systems for specific applications, should be referred to the DYMAX Applications Engineering at (860) 482-1010.

STORAGE AND SHELF LIFE

Store the material in cool, dark place when not in use. Do not expose to UV light or sunlight. This product may polymerize upon prolonged exposure to ambient light or atmospheric moisture. Reseal original package or container immediately after use. Resealing the container under nitrogen extends shelf life. Product has a 3 month shelf life when stored between 10°C [50°F] and 32°C [90°F] in the original, unopened container.

CLEAN UP

Uncured material may be removed from dispensing components and parts with non-alcoholic solvents. Cured material will be impervious to many solvents and difficult to remove. Clean up of cured material may require mechanical methods of removal.

GENERAL INFORMATION

This product is intended for industrial use only. Keep out of reach of children. Avoid breathing vapors. Avoid contact with skin, eyes, and clothing. Wear impervious gloves. Repeated or continuous skin contact with uncured material may cause irritation. Remove material from skin with soap and water. Never use organic solvents to remove material from skin and eyes. For more information on the safe handling of this material, please refer to the Material Safety Data Sheet before use.

RECOMMENDED LITERATURE

Lit010A	Guide to Selecting and Using UV Light Curing Systems
Lit019	UV Adhesives for Electronic Assembly
Lit077	Chemical Safety
Lit133	UV Light Curing System Safety Considerations
Lit159	ACCU-CAL™ 50 Radiometer
Lit204	Conformal Coating Selector Guide
Lit206	Flood and Focused Beam UV Light Curing Systems
Lit218	BlueWave® 200 UV Light Curing Spot Lamp

Literature is available through our website www.dymax.com or by calling any DYMAX location.

© 2008 DYMAX Corporation

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. DYMAX does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use is strictly limited to that contained in DYMAX's standard Conditions of Sale. DYMAX does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than DYMAX or act as a grant of license under any DYMAX Corporation Patent. DYMAX recommends that each user adequately test its proposed use and application before actual repetitive use, using the data contained in this bulletin as a general guide.

Rev. 01-27-09

DYMAX Corporation - 318 Industrial Lane - Torrington, CT 06790 - Phone: 860.482.1010 - Fax: 860.496.0608 - E-mail: info@dymax.com - www.dymax.com

DYMAX Europe GmbH - Trakehner Strasse 3 - D-60487 Frankfurt am Main - Germany - Phone: 0049.69.7165.3568 - Fax: 0049.69.7165.3830 - E-mail: dymaxinfo@dymax.de - www.dymax.de

DYMAX UV Adhesives & Equipment (Shenzhen) Ltd - Unit 807, Talfook Building, No. 9 Shi Hua Road, Futian Free Trade Zone, Shenzhen, China 518038
 Phone: 86.755.83485759 - Fax: 86.755.83485760 - E-mail: simon_ang@dymax.com - www.dymax.com.cn

DYMAX Asia (HK) - Unit 1006, 10/F., Carnarvon Plaza, No. 20, Carnarvon Road, T.S.T., Kowloon, Hong Kong - Phone: 852.2460.7038 - Fax: 852.2460.7017 -
 E-mail: simon_ang@dymax.com - www.dymax.com.cn

DYMAX®, Light-Weld®, Light-Welder®, Multi-Cure®, Ultra Light-Weld®, MEDI-CURE®, MD® and SPEEDMASK® are registered trademarks of DYMAX Corporation