

Ultra Light-Weld[®] 9641-LV Display Lamination Adhesive

APPLICATIONS

- Optical Bonding for Plasma and LCD Displays
- Polarizer Lamination
- Touch-Screen Bonding
- Display Ruggedizing

FEATURES

- UV/Visible Light Cure
- Medium Viscosity for Pouring onto Display Surface
- No VOCs

OTHER FEATURES

- Optimized Cure Speed and Modulus for Low-Stress Bonding
- Enhanced Resistance to Yellowing From Heat or UV Exposure
- Optically Clear

DYMAX Ultra Light-Weld[®] 9641-LV material is designed for large-area display-bonding applications where low-stress, optically clear bonds are required. DYMAX Ultra Light-Weld[®] materials contain no nonreactive solvents and cure upon exposure to UV or visible light, allowing cure through UV-blocking substrates. Their ability to cure in seconds enables faster processing, greater output, and lower processing costs. When cured with DYMAX light-curing spot lamps, focused-beam lamps, or flood lamps, they deliver optimum speed and performance for display bonding. DYMAX lamps offer the optimum balance of UV and visible light for the fastest, deepest cures. This product is in full compliance with the RoHS Directives 2002/95/EC and 2003/11/EC.

UNCURED PROPERTIES *

| Property | Value | Test Method |
|------------------------|-------------------------|-------------|
| Solvent Content | No Nonreactive Solvents | N/A |
| Chemical Class | Acrylated Urethane | N/A |
| Appearance | Clear | N/A |
| Soluble in | Organic Solvents | N/A |
| Density, g/ml | 0.98 | ASTM D1875 |
| Viscosity, cP (20 rpm) | 1,100 (nominal) | ASTM D-1084 |

CURED MECHANICAL PROPERTIES *

| Property | Value | Test Method |
|----------------------------------|-------------|-------------|
| Durometer Hardness | 00-30 | ASTM D2240 |
| Tensile at Break, MPa [psi] | 0.10 [15] | ASTM D638 |
| Elongation at Break, % | 215 | ASTM D638 |
| Modulus of Elasticity, MPa [psi] | 0.12 [17.5] | ASTM D638 |

OTHER CURED PROPERTIES *

| Property | Value | Test Method |
|-----------------------------------|-------|-------------|
| Refractive Index (20° C) | 1.475 | ASTM D542 |
| Boiling Water Absorption, % (2 h) | 3.3 | ASTM D570 |
| Water Absorption, % (25°C, 24 h) | 1.6 | ASTM D570 |
| Linear Shrinkage, % | 0.4 | ASTM D2566 |

* Not Specifications

N/A Not Applicable

ADHESION

| Substrate | Recommendation |
|-----------|----------------|
| Glass | ✓ |
| Plastic | ✓ |
| Polarizer | ✓ |

✓ Recommended o Limited Applications
 st Requires Surface Treatment (e.g. plasma, corona treatment, etc.)



CURING GUIDELINES

Fixture time is defined as the time to develop a shear strength of 0.1 N/mm² [10 psi] between glass slides. Actual cure time typically is 3 to 5 times fixture time.

| DYMAX Curing System (Intensity) | Fixture Time or Belt Speed ^B |
|---|---|
| 2000-EC (50 mW/cm ²) ^A | 9 s |
| 5000-EC (200 mW/cm ²) ^A | 5 s |
| BlueWave [®] 75 (5.0 W/cm ²) ^A | Not recommended |
| BlueWave [®] 200 (10 W/cm ²) ^A | Not recommended |
| UVCS Conveyor with one 5000-EC (200 mW/cm ²) ^C | 1.2 m/min [4.0 ft/min] |
| UVCS Conveyor with Fusion F300S (2.5 W/cm ²) ^C | 2.7 m/min [9.0 ft/min] |

A Intensity was measured over the UVA range (320-395 nm) using a DYMAX ACCU-CAL™ 50 Radiometer.

B Curing through light-blocking substrates may require longer cure times if they obstruct wavelengths used for light curing (320-400 nm for UV light curing, 320-450 nm for UV/Visible light curing). These fixture times/belt speeds are typical for curing thin films through 100% light-transmitting substrates.



C At 53 mm [2.1 in] focal distance. Maximum speed of conveyor is 8.2 m/min [27 ft/min]. Intensity was measured over the UVA range (320-395 nm) using the DYMAX ACCU-CAL™ 100 Radiometer.

Full cure is best determined empirically by curing at different times and intensities, and measuring the corresponding change in cured properties such as tackiness, adhesion, hardness, etc. Full cure is defined as the point at which more light exposure no longer improves cured properties. Higher intensities or longer cures (up to 5x) generally will not degrade DYMAX light-curable materials.

DYMAX recommends that customers employ a safety factor by curing longer and/or at higher intensities than required for full cure. Although DYMAX Applications Engineering can provide technical support and assist with process development, each customer ultimately must determine and qualify the appropriate curing parameters required for their unique application.

DEPTH OF CURE

The graphs below show the increase in depth of cure as a function of exposure time with two different lamps at different intensities. A 9.5 mm [0.37 in] diameter specimen was cured in a polypropylene mold and cooled to room temperature. It was then released from the mold and the cure depth was measured.

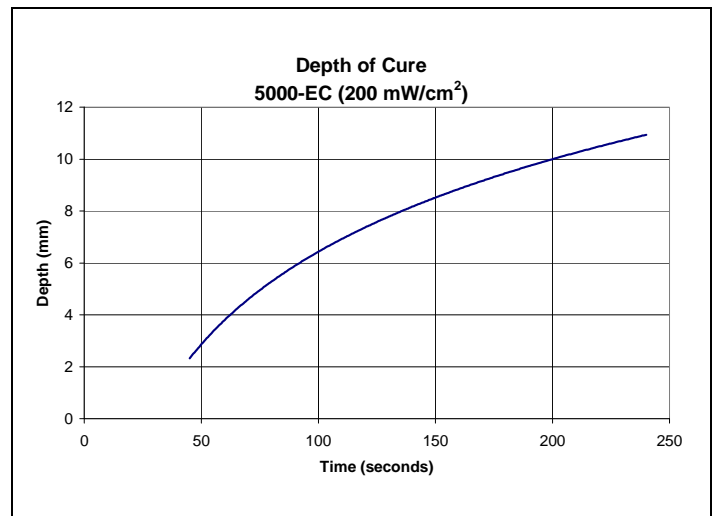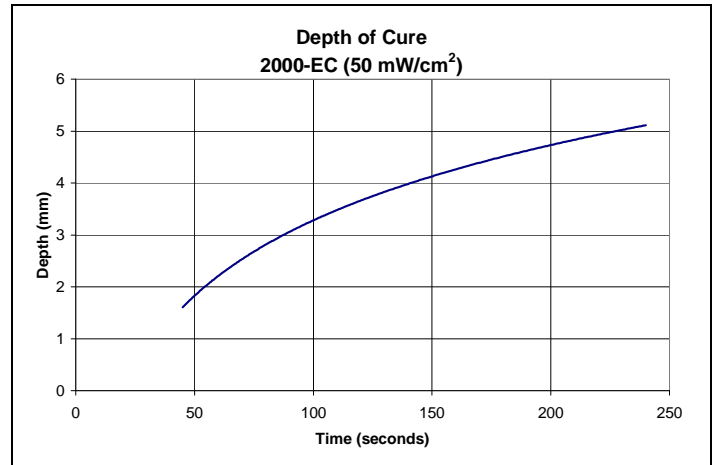

OPTIMIZING PERFORMANCE AND HANDLING

1. This product cures with exposure to UV and visible light. Exposure to ambient and artificial light should be kept to a minimum before curing. Dispensing components including needles and fluid lines, should be 100% light blocking not just UV blocking.
2. All surfaces in contact with the material should be clean and free from flux residue, grease, mold release, or other contaminants prior to dispensing the material.
3. Cure speed is dependent upon many variables, including lamp intensity, distance from the light source, required depth of cure, thickness, and percent light transmission of components between the material and light source.
4. Oxygen in the atmosphere may inhibit surface cure. Surfaces exposed to air may require high-intensity (>100 mW/cm²) UV light to produce a dry surface cure. Flooding the curing area with an inert gas, such as nitrogen, can also reduce the effects of oxygen inhibition.
5. Parts should be allowed to cool after cure before testing and subjecting to any loads or electrical testing.
6. In rare cases, stress cracking may occur in assembled parts. Three options may be explored to eliminate this problem. One option is to heat anneal the parts to remove molded-in stresses. A second option is to open any gap between mating parts to reduce stress caused by an interference fit. The third option is to minimize the amount of time the liquid material remains in contact with the substrate(s) prior to curing.
7. Light curing generally produces some heat. If necessary, cooling fans can be placed in the curing area to reduce the heating effect on components.
8. At the point of curing, an air exhaust system is recommended to dissipate any heat and vapors formed during the curing process.
9. 9641-LV adhesive is known to develop a uniform haze within days of being manufactured. The haze will settle over time, approximately six months later. Often, a uniformly distributed haze will result in a homogenous haze in the dispensed material. Heat exposure from the curing process will most likely cause the haze to disappear, resulting in a clear bond line. If the haze remains in the cured bond, follow best practices detailed in Lit260 for removing the haze prior to dispense. Lit260 is available by contacting DYMAX Applications Engineering.

DISPENSING THE MATERIAL

This material may be dispensed with a variety of manual and automatic applicators or other equipment as required. Questions relating to dispensing and curing systems for specific applications should be referred to DYMAX Applications Engineering.

CLEAN UP

Uncured material may be removed from dispensing components and parts with organic solvents. Cured material will be impervious to many solvents and difficult to remove. Clean up of cured material may require mechanical methods of removal.

PERFORMANCE AFTER TEMPERATURE EXPOSURE

Light-cured DYMAX materials typically have a lower thermal limit of -54°C [-65°F] and an upper limit of 150°C [300°F]. Many DYMAX products can withstand temperatures outside of this range for short periods of time, including typical wave-solder processes and reflow profiles. Please contact DYMAX Applications Engineering for assistance.

STORAGE AND SHELF LIFE

Store the material in a cool, dark place when not in use. Do not expose to light. This product may polymerize upon prolonged exposure to ambient and artificial light. Keep covered when not in use. This material has a minimum two-month shelf life from date of shipment, unless otherwise specified, when stored between 4°C [38°F] and 27°C [80°F] in the original, unopened container.

This product may turn hazy over time. If this should occur, gentle warming at 27°C [81°F] with occasional stirring will bring it back to its original condition. This re-heating process has no effect on cured properties.

GENERAL INFORMATION

This product is intended for industrial use only. Keep out of the reach of children. Avoid breathing vapors. Avoid contact with skin, eyes, and clothing. Wear impervious gloves. Repeated or continuous skin contact with uncured material may cause irritation. Remove material from skin with soap and water. Never use organic solvents to remove material from skin and eyes. For more information on the safe handling of this material, please refer to the Material Safety Data Sheet before use.

RECOMMENDED DYMAX LITERATURE

| | |
|---------|--|
| LIT010A | Guide to Selecting and Using UV Light-Curing Systems |
| LIT019 | Light-Curable Materials for Electronic Assembly |
| LIT041 | LCD Laminating Adhesives |
| LIT077 | Chemical Safety |
| LIT133 | UV Light-Curing System Safety Considerations |
| LIT159 | ACCU-CAL™ 50 Radiometer |
| LIT206 | Flood and Focused-Beam UV Light-Curing Systems |
| LIT218 | BlueWave® 200 UV Light-Curing Spot Lamp |

Literature is available through our website, www.dymax.com, or by calling any DYMAX location.