

# NEWS RELEASE

For Immediate Release  
April 12, 2011

Contact: Applications Engineering

## Fast-Curing Conformal Coating Features Superior Component and Sharp Lead Coverage

DYMAX [Multi-Cure® 9-20557](#) cures in seconds upon exposure to UV/Visible light and is designed for rapid conformal coating of printed circuit boards and other electronic assemblies. This product is specially formulated to remain on the edges of difficult-to-wet components and sharp leads. It has a secondary heat-cure feature which allows the coating to cure with heat in applications where shadowed areas exist.

Multi-Cure® 9-20557 has been optimized for coating thicknesses between 51 mic [0.002 in] and 510 mic [0.020 in]. This medium-viscosity material, designed to enhance wetting of leads, is compatible with most types of spray equipment. The low modulus of 9-20557 allows it to excel in coating applications where thermal shock performance is critical.

DYMAX light-curable [conformal coatings](#) eliminate many of the time-consuming process steps required by traditional thermal-cure and room-temperature-cure conformal coatings. With DYMAX conformal coatings, there is often no need to rack or dry boards after applying the coating. All coating applied to the board remains on the board, there is no flash off or evaporation required. The coating is applied, cured, and the product is immediately ready for shipment.

Multi-Cure<sup>®</sup> 9-20557 is a solvent-free conformal coating containing no VOCs, eliminating the need for solvent handling while enhancing worker safety and minimizing environmental impact. Each conformal coating is one part (no mixing required) for easy dispensing. This product is isocyanate free, IPC-CC-830 approved, MIL-I-46058 listed, and UL recognized.

In addition to their headquarters in Torrington, DYMAX has locations in [Germany](#), [China](#), [Hong Kong](#), and [Korea](#) which serve the assembly needs of the [medical](#), [electronic](#), [optical](#), [automotive](#), [appliance](#), [metal finishing](#), [power generation](#), and [industrial](#) markets worldwide.

[DYMAX Corporation](#) is a leading technology-based company specializing in the formulation, manufacture, and service of advanced assembly [adhesives](#), [coatings](#), [epoxies](#), [masking resins](#), and [light-curing systems](#).

For more information, contact DYMAX Corp., 318 Industrial Lane, Torrington, CT 06790; Phone: 860-482-1010; Fax: 860-496-0608; Toll Free: 1-877-DYMAX-UV (1-877-396-2988); e-mail: [info@dymax.com](mailto:info@dymax.com) or visit our website at [www.dymax.com](http://www.dymax.com).

---

**DYMAX Corporation** - 318 Industrial Lane - Torrington, CT 06790 - Phone: 860.482.1010 - Fax: 860.496.0608 - E-mail: [info@dymax.com](mailto:info@dymax.com) - [www.dymax.com](http://www.dymax.com)

**DYMAX Europe GmbH** - Kasteler Strasse 45 - Building G 359 - 65203 Wiesbaden, Germany - Phone: +49 (0) 611.962.7900 - Fax: +49 (0) 611.962.9440 - E-mail: [info\\_de@dymax.com](mailto:info_de@dymax.com) - [www.dymax.de](http://www.dymax.de)


**DYMAX UV Adhesives & Equipment (Shenzhen) Co., Ltd** - Unit 807, Talfook Building, No. 9 Shihua Road, Futian Free Trade Zone, Shenzhen, China 518038 - Phone: +86.755.83485759 - Fax: +86.755.83485760 - E-mail: [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com) - [www.dymax.com.cn](http://www.dymax.com.cn)

**DYMAX Asia (HK)** - Room 1103, 11/F., Metro Centre, Phase I, 32 Lam Hing St., Kowloon Bay, Hong Kong - Phone: +852.2460.7038 - Fax: +852.2460.7017 - E-mail: [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com) - [www.dymax.com.cn](http://www.dymax.com.cn)

**DYMAX Korea LLC** - #903, CCMM B/D, 12 Yeoido-Dong, Youngdungpo-Gu, Seoul, Korea, 150-869 - Phone: 82.2.784.3434 - Fax: 82.2.784.5775 - E-mail: [info@dymax.kr](mailto:info@dymax.kr) - [www.dymax.co.kr](http://www.dymax.co.kr)

## CAPTION

DYMAX [Multi-Cure® 9-20557](#) cures in seconds upon exposure to UV/Visible light

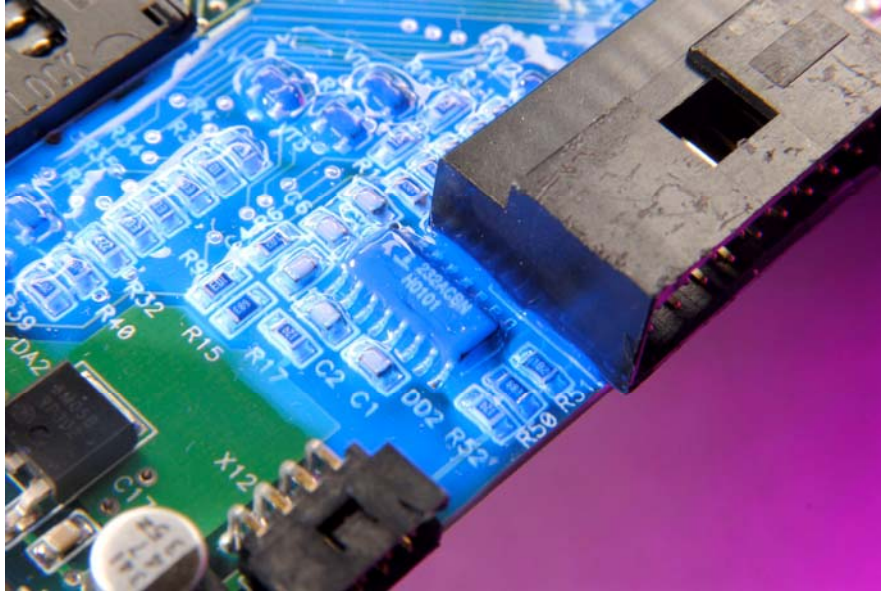

# # #

© 2011 DYMAX Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by DYMAX Corporation, U.S.A.

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. DYMAX does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use is strictly limited to that contained in DYMAX's standard Conditions of Sale. DYMAX does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than DYMAX or act as a grant of license under any DYMAX Corporation Patent. DYMAX recommends that each user adequately test its proposed use and application before actual repetitive use, using the data contained in this bulletin as a general guide. P250

DYMAX Corporation - 318 Industrial Lane - Torrington, CT 06790 - Phone: 860.482.1010 - Fax: 860.496.0608 - E-mail: [info@dymax.com](mailto:info@dymax.com) - [www.dymax.com](http://www.dymax.com)

DYMAX Europe GmbH - Kasteler Strasse 45 - Building G 359 - 65203 Wiesbaden, Germany - Phone: +49 (0) 611.962.7900 - Fax: +49 (0) 611.962.9440 - E-mail: [info\\_de@dymax.com](mailto:info_de@dymax.com) - [www.dymax.de](http://www.dymax.de)

DYMAX UV Adhesives & Equipment (Shenzhen) Co., Ltd - Unit 807, Talfook Building, No. 9 Shihua Road, Futian Free Trade Zone, Shenzhen, China 518038 - Phone: +86.755.83485759 - Fax: +86.755.83485760 - E-mail: [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com) - [www.dymax.com.cn](http://www.dymax.com.cn)

DYMAX Asia (HK) - Room 1103, 11/F., Metro Centre, Phase I, 32 Lam Hing St., Kowloon Bay, Hong Kong - Phone: +852.2460.7038 - Fax: +852.2460.7017 - E-mail: [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com) - [www.dymax.com.cn](http://www.dymax.com.cn)

DYMAX Korea LLC - #903, CCMM B/D, 12 Yeoido-Dong, Youngdungpo-Gu, Seoul, Korea, 150-869 - Phone: 82.2.784.3434 - Fax: 82.2.784.5775 - E-mail: [info@dymax.kr](mailto:info@dymax.kr) - [www.dymax.co.kr](http://www.dymax.co.kr)