

Choosing an Underfill Resin to Minimize Cost

Process Cost Savings as High as 90% Can be Achieved by Selecting Underfill Resins That Reduce Processing Time

UV light-curable urethanes flow rapidly and cure in seconds while epoxies and silicones can require hours at 150°C to fully cure. Fillers in epoxies may hinder wicking and flow under dies and around solder joints and heat cure unevenly. Higher viscosity epoxy and silicone resins must be heated in order to allow them to flow and underfill the die. Unless this heat is carefully controlled, the resultant partial cure may increase viscosity, lengthen wicking time, inhibit wetting and underfilling, and increase costs.

Resin Type	Wicking Time	Condition	Cure Time	Condition
DYMAX 9001-E V3 Series	15-60 seconds	Room temperature	30-90 seconds	UV/Visible/IR Lamp
Silicone	5-15 minutes	Mix 2 parts, heating required to lower viscosity	1 to several hours	125°C or more
Epoxy	5-20 minutes	Heating required to lower viscosity	1 to several hours	150°C - 165°C

The three distinctly different types of underfill resins - epoxies, silicones, and UV-curable urethanes - use different strategies to eliminate stress and protect circuit integrity.

Only flexible resins with low moduli, high elongation, and gradually sloping TMA (thermal mechanical analysis) curves, provide a mechanism to dissipate thermal and mechanical shock and minimize stress on chips and bonds. Stress minimization also requires that there be no abrupt changes in the underfill resin's physical form. Unless the base resin (not the resin + the filler) has a T_g above or below device operating temperature, abrupt physical change can occur during thermal cycling, resulting in stress.

Flexible DYMAX UV light-curable urethane resins reduce stress on solder joints during thermal cycling because their physical dimensions change only gradually when passing through T_g . The T_g is near or below the lower end of typical semiconductor operating ranges.

Epoxies are high T_g (80-100°C) resins that are then highly filled to lower the measured bulk CTE, (not the CTE of the base resin), in an attempt to match the CTE of the substrates. Theoretically, if T_g is above a device's thermal operating range, dimensional change and stress in the device may be avoided. However, silicon, solder, and substrates have a different CTE, making strain on adjacent components all but unavoidable. Rigid, high T_g polymers transfer stresses to less rigid solder bumps, joints and/or chips, potentially leading to failures.

To calculate how a filled epoxy stresses silicon over -55° to 125°C temperature:

$$\text{Stress} = (\text{CTE Resin} - \text{CTE Silicon})(\text{Temp})(\text{Modulus})$$


$$\text{Stress} = (20 \times 10^{-6}) \times 180 \times 1.5 \times 10^6 = 3780 \text{ psi}$$

Low Modulus Means Low Stress

Resin	Silicon	Solder	PCB
UV Urethane	14 psi	12 psi	14 psi
Silicone	14 psi	12 psi	14 psi
Filled Epoxy	3,780 psi	2,160 psi	2,170 psi

Urethanes and silicones exhibit the inherent advantages of low modulus polymers. Referencing the strain equation, low modulus can be more effective than low CTE in lowering stress. High elongation, soft, flexible underfill resins provide a mechanism, through which mechanical and thermal shock can be dissipated through vibration dampening and expansion of the underfill in the X, Y plane. The figures below compare the calculated differential stresses that high versus low modulus resins can transfer to adjacent component parts over a -55°C to + 125°C temperature range.

Stress on Components Arising From Different Encapsulants

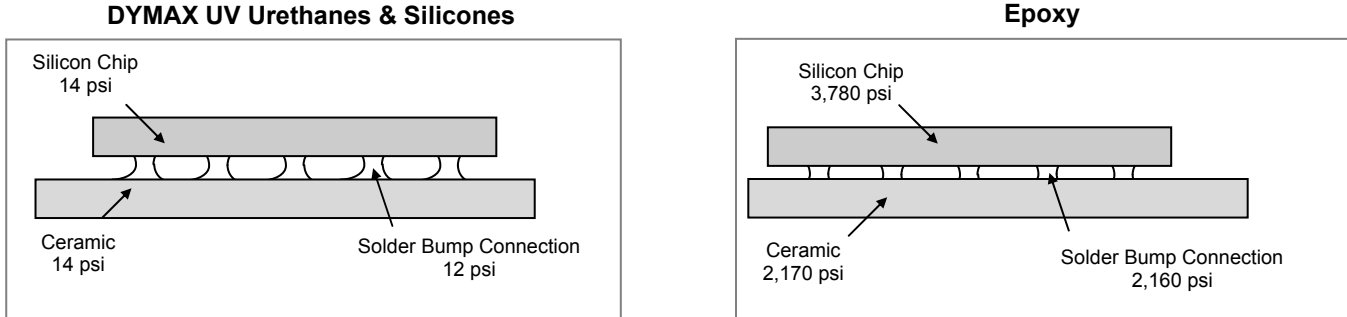

UV Urethanes Speed Processing - Lower Cost

Low Viscosity UV Urethanes Speed Flow and Ensure Complete Fill Under the Die

Low-viscosity underfill grades of DYMAX UV light-curable urethanes dramatically lower costs by curing in 30-to-90 seconds under special UV/Visible lamps. Processing costs are further lowered because room-temperature wicking eliminates heating and lowers die underfill times to less than 1 minute depending on the size of the device and the number of solder connections.

Voids, especially in the resin/chip or resin/solder interface, concentrate stress and can interfere with the dissipation of thermal and mechanical energy, lowering chip performance. It is more difficult to eliminate voids in high-viscosity resins. The wetting agents in low-viscosity DYMAX UV light-curable urethanes help prevent voids in the underfill.

As filled resins are heated, the higher viscosity which is needed for uniform filler suspension is also decreased, creating the potential for leaving agglomerated filler at solder connections. The CTE, therefore, would vary in base-resin areas as compared to "filled" areas, causing major stress in the silicon. Voids and air gaps resulting from incomplete fill represent several potential mechanisms for additional failure sites. DYMAX 9001-E V3 Series encapsulants are not filled in order to minimize wick times and avoid filler separation.

ARTICLE EXCERPTED FROM ADHESIVES '95, SOCIETY OF MECHANICAL ENGINEERS, DEARBORN, MI 48121

For further assistance with adhesive and equipment selection, contact your DYMAX Applications Engineer.



In the U.S. Call: 877.396.2963

In North and South America Call: +1.860.482.1010

In Europe Call: +49 (0) 611.962.7900

In Asia Call: +86.755.83485759

In Korea Call: 82.2.784.3434

www.dymax.com ■ www.dymax.de ■ www.dymax.com.cn ■ www.dymax.co.kr

DYMAX Corporation - 318 Industrial Lane - Torrington, CT 06790 - Phone: 860.482.1010 - Fax: 860.496.0608 - E-mail: info@dymax.com - www.dymax.com

DYMAX Europe GmbH - Kasteler Strasse 45 - 65203 Wiesbaden, Germany - Phone: +49 (0) 611.962.7900 - Fax: +49 (0) 611.962.9440 - E-mail: info_de@dymax.com - www.dymax.de

DYMAX UV Adhesives & Equipment (Shenzhen) Co., Ltd - Unit 807, Talfook Building, No. 9 Shihua Road, Futian Free Trade Zone, Shenzhen, China 518038 - Phone: +86.755.83485759 - Fax: +86.755.83485760 - E-mail: dymaxasia@dymax.com - www.dymax.com.cn

DYMAX Asia (HK) - Room 1103, 11/F., Metro Centre, Phase I, 32 Lam Hing St., Kowloon Bay, Hong Kong - Phone: +852.2460.7038 - Fax: +852.2460.7017 - E-mail: dymaxasia@dymax.com - www.dymax.com.cn

DYMAX Korea LLC - #903, CCMM B/D, 12 Yeoido-Dong, Youngdungpo-Gu, Seoul, Korea, 150-869 - Phone: 82.2.784.3434 - Fax: 82.2.784.5775 - E-mail: info@dymax.kr - www.dymax.co.kr

© 1991-2010 DYMAX Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by DYMAX Corporation, U.S.A.

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. DYMAX does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use is strictly limited to that contained in DYMAX's standard Conditions of Sale. DYMAX does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than DYMAX or act as a grant of license under any DYMAX Corporation Patent. DYMAX recommends that each user adequately test its proposed use and application before actual repetitive use, using the data contained in this bulletin as a general guide.

LIT026 03/22/2010